



# **bizhub c**360i











#### **CUSTOMER BENEFITS**



Intuitive operability Operate the bizhub like a smartphone or tablet with fully customized user interface



Mobile connectivity Print anytime from anywhere with Konica Minolta's innovative mobile technologies



Security Secure network integration, data encryption, SSD overwrite, and advanced user authentication



Application ecosystem Enhanced efficiency thanks to Konica Minolta's extensive applications portfolio



Productivity Reliability, high-speed scanning and printing, combined with powerful finishing functions



Sustainability Efficient printer fleet management, including automatic consumables delivery, pro-active maintenance and remote setup

## **OPTIONS**



**OCR text recognition** 

**Barcode fonts** 

Unicode fonts LK-107 OCR A and B fonts

**Document converter pack** LK-110v2

ThinPrint® client LK-111














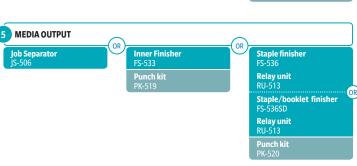

# **FINISHING FUNCTIONALITIES**







punching



Three-hole

punching

**Duplex** 



Combined

mixplex/

mixmedia





insertion.

report









Letter-fold

**Booklet** 

Offset sorting

Banner printing

# **DESCRIPTIONS**

		URFS

LK-102v3 PDF enhancements	PDF/A (1b); PDF encryption; digital signature	
LK-105v4 OCR text recognition	Searchable PDF and PPTX	
LK-106 Barcode fonts	Supports native barcode printing	
LK-107 Unicode fonts Supports native Unicode printing		
LK-108 OCR A and B fonts	Supports native OCR A and B font printing	
LK-110v2 Document converter pack	Generates various file formats incl. DOCX; XLSX and PDF/A	
LK-111 ThinPrint® Client	Print data compression for reduced network impact	
LK-116 Antivirus	Bitdefender® Antivirus provides real time scanning	
	of all input/output data	

#### CONNECTIVITY

CONNECTIVITY		
FK-514 Fax board	Super G3 fax, digital fax functionality	
FK-515 Fax board	Super G3 fax, digital fax functionality, lines 3 & 4 support	
MK-742	Installation kit for FK-515	
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode	
EK-608 USB I/F kit	USB keyboard connection	
EK-609 USB I/F kit	USB keyboard connection; Bluetooth	
IC-420 Fiery controller	Professional color print controller	
VI-516 Interface kit for IC-420	Fiery controller interface card	
UK-115 Interface board for IC-420	Fiery controller interface board	
AU-102 Biometric authentication	Finger vein scanner	
AU-205H card reader	Various ID card technologies	
MK-735 Mount kit	Installation kit for ID card reader	

#### OTHERS

DF-632 Document feeder	Reversing automatic document feeder, capacity 100 originals	
DF-714 Document feeder	Dualscan automatic document feeder, capacity 100 originals	
OC-511 Original cover	Cover instead of ADF	
WT-506 Working table	Authentication device placement	
KP-102 10-Key pad	For use instead of touchscreen	
SC-509 Security kit	Copy guard function (2 kits required for Dualscan ADF)	
KH-102 Keyboard holder	To place USB keyboard	
External Keyboard Keyboard for alpha numeric data entry		

## MEDIA INPUT

<b>PC-116 1 Universal tray</b> 500 sheets, 5.5" x 8.5" to 11" x 17", 52-256 gsm		
PC-216 2 Universal tray	2x 500 sheets, 5.5" x 8.5" to 11" x 17", 52-256 gsm	
PC-416 Large capacity tray	2,500 sheets, 8.5" x 11", 52-256 gsm	
LC-302 Large capacity tray 3,000 sheets, 8.5" x 11", 52-256 gsm		
MK-730 Banner tray Multipage banner feeding		
DK-516 Copier desk	Provides storage space for print media and other materials	

#### MEDIA OUTPUT

FS-533 Inner finisher	50-sheet stapling, 500 sheets max. output	
PK-519 Punch kit for FS-533	2/3 hole punching, autoswitching	
FS-536 Staple finisher	50-sheet stapling, 3,300 sheets max. output	
FS-536SD Booklet finisher	50-sheet staple finisher; 20-sheet booklet finisher;	
	2,300 sheets max. output	
PK-520 Punch kit for FS-536(SD)	2/3 hole punching; autoswitching	
RU-513 Relay unit	For FS-536(SD)/FS-537(SD) installation,	
	(Max. 100 sheets output capacity)	
JS-506 Job separator	Separation of fax output; etc.	

# **TECHNICAL SPECIFICATIONS**

# SYSTEM SPECIFICATIONS Panel size /resolution

Panel size/resolution	10.1" / 1024 x 600	
System memory (standard/max)	8 GB	
Solid State Drive	256 GB (standard)	
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;	
	Wi-Fi 802.11 b/g/n (optional)	
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP;	
	HTTP(S); AppleTalk; Bonjour	
Automatic document feeder (optional)	Up to 100 originals; A6–A3; 35–163 gsm;	
	RADF or Dual scan ADF available	
Paper input capacity (standard/max)	1,150 sheets / 6,650 sheets	
Paper tray input (standard)	1x 500 sheets; 3.5" x 8.5" to 11" x 17"; custom sizes; 52–256 gsm	
	1x500 sheets; 5.5" x 8.5" to 12" x 18"; custom sizes; 52–256 gsm	
Paper tray input (optional)	2x 500 sheets; 5.5" x 8.5" to 11" x 17"; 52–256 gsm	
	1x 2,500 sheets; 8.5" x 11"; custom sizes; 52–256 gsm	
Large capacity tray (optional)	1x 3,000 sheets; 8.5" x 11"; custom sizes; 52–256 gsm	
Manual bypass	150 sheets; 3.5" x 8.5" to 12" x 18"; Custom sizes; Banner;	
	60-300 gsm	
Automatic duplexing	5.5" x 8.5" to 12" x 18"; 52–256 gsm	
Finishing modes (optional)	Offset; Group; Sort; Staple; Punch; Half-fold; Letter-fold; Booklet	
Output capacity (standard)	Max. 250 sheets	
Output Capacity (optional)	Max. 3,300 sheets	
Stapling	Max. 50 sheets or 48 sheets + 2 cover sheets (up to 209 gsm)	
Letter fold	Max. 3 sheets	
Letter fold capacity	Max. 30 sheets; unlimited (without tray)	
Booklet	Max. 20 sheets or 19 sheets + 1 cover sheet (up to 209 gsm)	
Booklet output capacity	Max. 100 booklets; unlimited (without tray)	
Copy/print volume (monthly)	Max. <sup>1</sup> 175,000 pages	
Toner lifetime	Black up to 28,000 pages	
	CMY up to 28,000 pages	

Imaging unit lifetime	Black up to 225,000/1,000,000 pages (drum/developer)	
	CMY up to 105,000/1,000,000 pages (drum/developer)	
Power consumption	110–120 V / 50/60 Hz; Less than 1.50 kW	
System dimension (W x D x H)	24.2" x 27" x 31" (without options)	
System weight	Approx. 187 lbs. (without options)	

#### PRINTER SPECIFICATIONS (STANDARD)

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi	
Print Speed letter (mono/color)	Up to 36/36 ppm	
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS	
Operating System	Windows 7 (32/64); Windows 8/8.1 (32/64); Windows 10 (32/64);	
	Windows Server 2008 (32/64); Windows Server 2008 R2;	
	Windows Server 2012; Windows Server 2012 R2;	
	Windows Server 2016; Windows Server 2019;	
	Macintosh OS X 10.10 or later; Unix; Linux; Citrix	
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin	
Mobile printing	AirPrint (iOS); Mopria (Android);	
	Konica Minolta Mobile Print (iOS/Android/Windows 10 Mobile);	
	Mobile Authentication and Pairing (iOS/Android)	
	Optional: Google Cloud Print; WiFi Direct	

### PRINTER SPECIFICATIONS (OPTIONAL)

Print controller	Embedded Fiery IC-420	
Controller CPU	AMD GX-424CC @ 2.4 GHz	
Memory/HDD	2 GB / 500 GB	
Page description language	Adobe PostScript 3 (CPSI 3020); PCL 6; PCL 5c	

Scan speed (mono/color)	Up to 100/100 ipm in simplex	
	Up to 200/200 ipm in duplex	
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);	
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;	
	Scan-to-URL; TWAIN scan	
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF;	
	XPS; Compact XPS; PPTX	
	Optional: Searchable PDF; PDF/A 1a and 1b;	
	Searchable DOCX/PPTX/XLSX	
Scan destinations	2,100 (single + group); LDAP support	
COPIER SPECIFICATIONS		
lmaging technology	Laser	
Toner technology	Simitri® HD polymerized toner	
Copy/print speed letter (mono/color)	Up to 36/36 ppm	
Copy/print speed 11"x17"	Up to 18/18 ppm	
(mono/color)		
Autoduplex Speed letter (mono/color)	Up to 36/36 ppm	
1st copy out time letter	4.6/6.1 sec.	
Warm-up time	Approx. 12 sec. in mono; 13 sec. in color <sup>2</sup>	
Copy resolution	600 x 600 dpi	
Gradation	256 gradations	
Multicopy	1-9,999	
Original format	3.5" x 8.5" to 11" x 17"; Custom sizes	
Magnification	25-400% in 0.1% steps; Auto-zooming	
FAX SPECIFICATIONS		
Fax standard	Super G3 (optional)	
Fax transmission	Analog; i-Fax; Color i-Fax; IP-Fax	
Fax resolution	Up to 600 x 600 dpi	
Fax compression	MH; MR; MMR; JBIG	
Fax modem	Up to 33.6 Kbps	

LICED	$D \cap V$	CDECIE	LCATIONIC
USEK	BUX	SPEULE	ICATIONS

Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling
SYSTEM FEATURES	
Security Functions (standard)	ISO 15408 HCD-PP Common Criteria (in evalutation); IP filtering
	and port blocking; SSL2; SSL3 and TLS1.0/1.1/1.2/1.3 network
	communication; IPsec support; IEEE 802.1x support;
	User authentication; Authentication log; Secure print; Kerberos;
	Solid state drive overwrite (8 standard types); SSD data
	encryption (AES 256); Memory data auto deletion; Confidential
	fax receipt; Print user data encryption
Security Functions (optional)	Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard, Password Copy)
Accounting (standard)	Up to 1,000 user accounts; Active Directory support (user name +
	password + e-mail + smb folder); User function access definition
Accounting Functions (optional)	Biometric authentication (finger vein scanner);
	ID card authentication (ID card reader);
	Authentication by mobile device (Android/iOS)
Software	Net Care Device Manager; Data Administrator; Box Operator;
	Web Connection; Print Status Notifier; Driver Packaging Utility;
	Log Management Utility

<sup>&</sup>lt;sup>1</sup> Maximum monthly copy/print volume supported under standard vendor supplied service. Defines the upper end of the expected customer volume for the device. Customers should consider multiple machines if average monthly volume approaches duty cycle on a continual basis.

- All specifications refer to letter-size paper of 80 gsm weight.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (6% coverage of letter). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.

  Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

### PARTNERSHIP.

INFORMATION MANAGEMENT

**Automated Workflow Solutions** 

**Business Process Automation** 

Document Management

Security and Compliance

eDiscovery Services

Mobility

Fax destinations

Konica Minolta can help give shape to your ideas and partner with you to achieve your corporate objectives. Contact us to realize opportunities in:

2,100 (single + group)

Enterprise Content Management (ECM) **Application Services Cloud Services** IT Security Managed IT Services IT Consulting & Projects Apple Managed Services Managed Voice Services

Technology Implementation

and Deployment

**IT SERVICES** 

**TECHNOLOGY** Office Multifunction Business Solutions Commercial and Production Printers **Industrial Printers** Wide Format Printers 3D Printers Scanners Security Surveillance Systems

Laptops, Desktops and Computer Hardware

Servers and Networking Equipment Managed Print Services (MPS)

Managed Enterprise Services

































<sup>&</sup>lt;sup>2</sup> Warm-up time may vary depending on the operating environment and usage.